


HD/DVR Installation & Setup

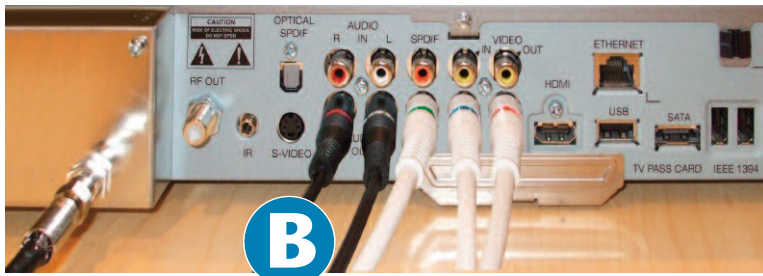


With any HD “self-install” Midcontinent Communications does not provide the cabling (HD Component Cables, Audio Cables or HDMI Cable) nor will a technician be there to assist in setting up the DVR for HD. Should an issue arise relating to your HD service you may incur a \$35 (or more) Service Call charge unless it is a problem with the quality of our HD signal.

1. Connect the DVR to your TV by first connecting the cable line from the wall to the **cable IN port** on the back of the DVR. (Fig. **A**) Next, attach the power cable to the back of the DVR and then to the outlet.

Connect the DVR to your TV using **Component HD and Composite Audio Cables**. (Fig. **B**)

Or, connect the DVR to your TV using an **HDMI cable**. (Fig. **C**)

2. With the DVR hooked up to the TV, turn on the TV but leave the DVR turned off.
3. Press the menu button on the front of the DVR. This should bring up the **User Setting Screen** on the TV screen. (Fig. **D**)

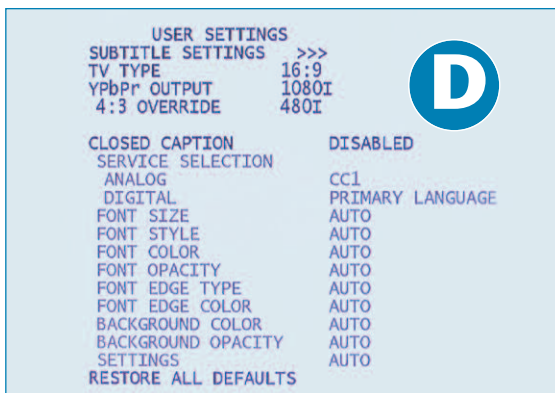


(See other side for more details on user settings.)



1-800-888-1300 • www.midcocomm.com

HD/DVR Installation & Setup

(continued)

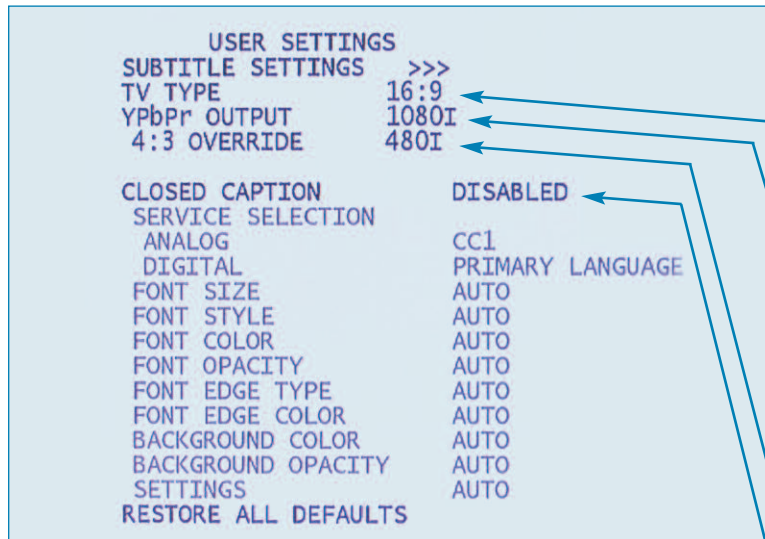

The User Setting Screen

The following settings are the default. These should only be changed if needed.

- **TV Type** – This setting should match your TV set’s aspect ratio. For most HD installs the best option is going to be the 16:9 widescreen formats. In some case your TV might not be a widescreen and may need to be changed to the 4:3 letterbox formats. Please consult your TV’s Owner’s Manual to see what the best setting is for your TV.

To change this setting aim the remote at the DVR and, using the directional arrows on the remote, select TV TYPE then arrow right until 16:9 is selected.

- **YPbPr Output** – This sets the video display format for the component video outputs. The setting is usually 1080i, however depending on your TV, it may need to be changed to 720p. Please consult your TV’s owners manual to see what the optimal solution is.

To change this setting aim the remote at the DVR and, using the directional arrows on the remote, select YPbPr Output then arrow right until 1080i or 720p is selected (depending upon your TV Owner’s Manual specifications.)

- **4:3 Override** – The default option is 480i and should not need to be changed.
- **Closed Captioning** – This allows the activation of closed captioning on both analog and digital channels.

To change this setting and activate/deactivate closed captioning, aim the remote at the DVR and, using the directional arrows on the remote, select CLOSED CAPTIONED then arrow right once to enable/disable.

Please remember that with any HD “self-install” Midcontinent Communications will not provide any HD or audio cables nor will we provide support in setting up the DVR for HD. Also any issues relating to HD service installed by you will necessitate a Service Call by a Midcontinent Communications technician and will result in a charge to the customer of at least \$35.



1-800-888-1300 • www.midcocomm.com